CoGe LoadExp+: A web-based suite that integrates next-gen sequencing data analysis workflows and visualization

Jeffrey W. Grover[1], Matthew Bomhoff[2, 4], Sean Davey[2, 4], Brian D. Gregory[3], Rebecca A. Mosher[1, 2, 4]*, and Eric Lyons[2, 4]*

[1]Department of Molecular and Cellular Biology, University of Arizona, Tucson, AZ 85721, USA

[2]BIO5 Institute, University of Arizona, Tucson, AZ 85721, USA

[3]Department of Biology, University of Pennsylvania, Philadelphia, PA 19104, USA

[4]School of Plant Sciences, University of Arizona, Tucson, AZ 85721, USA

*To whom correspondence should be addressed.

Contact: ericlyons@email.arizona.edu, rmosher@email.arizona.edu

Running Title: LoadExp+ for NGS analysis

Keywords

Genomics, Epigenomics, Next-generation sequencing, RNAseq, expression analysis, bisulfite sequencing, DNA methylation, ChIP-seq, SNP identification, population genetics

Abstract

To make genomic and epigenomic analyses more widely available to the biological research community, we have created LoadExp+, a suite of bioinformatics workflows integrated with the web-based comparative genomics platform, CoGe. LoadExp+ allows users to perform transcriptomic (RNA-seq), epigenomic (BS-seq), chromatin-binding (ChIP-seq), variant identification (SNPs), and population genetics analyses against any genome in CoGe, including genomes integrated by users themselves. Through LoadExp+'s integration with CoGe's existing features, all analyses are available for visualization and additional downstream processing, and are available for export to CyVerse's data management and analysis platforms. LoadExp+ provides easy-to-use functionality to manage genomics and epigenomics data throughout its entire lifecycle and facilitates greater accessibility of genomics analyses to researchers of all skill levels. LoadExp+ can be accessed at https://genomevolution.org.

Background

As advanced next-generation sequencing (NGS) technologies become more powerful and affordable, a growing number of researchers find themselves in a position to answer genome-scale biological questions using both existing and newly generated data. However, despite rapid technological advances, the knowledge and computational resources needed to analyze and interpret multiple large genomic datasets create bottlenecks for scientific discovery. While initiatives exist to provide high performance computing resources (e.g., CyVerse, XSEDE) [1, 2] to life scientists, these resources require computational expertise to exploit. Researchers in the life sciences without this expertise would benefit from a platform focused on NGS data and genomics analyses that integrates data management, analysis, and visualization tools into a single user-friendly interface. Such a platform also benefits more advanced users by simplifying the process of analyzing, visualizing, managing, and distributing data with collaborators.

We have addressed these needs with the creation of LoadExp+, an addition to the comparative genomics platform, CoGe (https://genomevolution.org) [3]. LoadExp+ is a web portal through which numerous genomic and epigenomic analyses can be conducted. These analyses include RNAseq, whole-genome bisulfite-sequencing (BS-seq), ChIPseq, SNP identification, and population genetics calculations. The collection of these tools in one location, integration with an advanced genome browser, and the use of CoGe's user-friendly interface present advantages over other web-based bioinformatics platforms for the life sciences. For advanced users, there is also an REST API available for programmatic access to data integrated through LoadExp+ (https://goo.gl/Pf4xjf).

Results

Web Interface

LoadExp+ is accessible from CoGe's main page from the menu bar under "Tools" or the User Data page by clicking "Load Experimental Data." It is intuitive to navigate, with mouse-over descriptions and conspicuous links to documentation for each tool. Users begin their experimental set-up by selecting data to load from their local computer, specifying a web address (HTTP or FTP), inputting NCBI Short Read Archive (SRA) accession numbers, or selecting files from the user's CyVerse Data Store (**Figure 1**). Options for LoadExp+'s integrated programs, otherwise accessible as command-line arguments, are then presented as checkboxes or entry fields. When setting up their desired analysis users must also name and describe their experiment, provide version information, and indicate the source of their data.

Before submitting their desired analysis users can choose to have the resulting files automatically organized into a new or existing notebook (**Supplemental Figure S1 and S2**), and have an email sent to them when their analysis is complete. After submitting their analysis users are automatically presented with a window in which to monitor its progress as well as a

persistent link that they can use to return to the progress window. Users can also navigate to their “My Data” page to check the progress of submitted LoadExp+ workflows under “Analyses.” Results from the user’s analysis are available for viewing and further analysis in the EPIC-CoGe genome browser (see below). All files, including intermediate files, generated from the analysis can also be downloaded from the Experiment View page (**Supplemental Figure S3 and S4**) or exported to the CyVerse Data Store. These files are also available through a RESTful API following completion of the run.

Supported Data Formats and Metadata Attribution

LoadExp+ supports the input of data in a variety of formats, including raw sequencing reads (FASTQ, SRA), compressed data (.gz, .zip), or preprocessed data in the form of alignments (BAM), polymorphism data (VCF, GVCF), and quantitative data (CSV/TSV, BED, GFF/GTF, WIG). These data can be uploaded directly from the user’s computer, retrieved from a remote server (FTP/HTTP), imported from their CyVerse Data Store (recommended for files > 1GB), or retrieved from NCBI’s Short Read Archive by accession or project number. Transferring data between CoGe and the CyVerse Data Store uses iRODS [4] for secure, high-performance, parallel file transfers.

Users are prompted to supply metadata, which are captured for every experiment, including the name, description, type, and source of the data. Additionally, the analysis program(s), parameters, and the options chosen at run-time are captured automatically and are immutable. After an experiment has been loaded, researchers can add additional metadata including text-based descriptions, web links, and images (**Supplemental Figure S4**).

Integrated Analysis Workflows

LoadExp+ is a unified platform encompassing a variety of popular and powerful genomic and epigenomic analyses. The following NGS workflows are currently available in LoadExp+: RNA-seq, whole-genome BS-seq, ChIP-seq, SNP identification, and population genetics analysis. More detailed information for each analysis workflow is collected in **Table 1**. A schematic view of LoadExp+ workflows can be seen in **Figure 1** and a full list of all tools is provided in **Supplemental Table S1**. Many workflows share usage of the various aligners integrated into LoadExp+ including GSNAP [12], Bowtie2 [13], TopHat2 [14], or HISAT2 [15]. Sequencing reads can be trimmed by either CutAdapt [16] or Trim Galore! [17].

Analyses are dispatched by a job scheduling engine, based on WorkQueue [18]. Users can request a notification email upon completion and monitor the job under the Activity and Data Loading tabs in the My Data page, or with a persistent link displayed on the progress window. All data integrated by users are kept private by default and may be shared with defined collaborators through the My Data page (**Supplemental Figure S5**). Each LoadExp+ workflow generates output files that can be visualized in the EPIC-CoGe genome browser with a single click. Output files can also be downloaded or exported to CyVerse for users to perform additional analyses.

Flexible Data Visualization With EPIC-CoGe

We have integrated a customized version of JBrowse [19], called EPIC-CoGe (https://goo.gl/cWX0PB), within CoGe to visualize the data generated by LoadExp+ and other appropriately formatted data. The browser will display any of the thousands of genomes available in CoGe onto which experimental data tracks may be overlaid. Each file generated by LoadExp+ is automatically loaded and made available as selectable tracks for viewing in EPIC-CoGe. Critically, users may simultaneously display their own private data and publicly available data already present in CoGe for the selected genome (**Figures 2 and 3**). Users can also mix

124 and match display of different visualization tracks, comparing the results of different NGS
125 workflows as well as data from different labs' experiments. While browsing a genome of interest
126 and exploring their experimental data users may export results from a genomic region of
127 interest, search quantitative tracks for minima, maxima, or a range of data, and search for SNPs
128 overlapping annotated genomic features. Users can also download complete experimental
129 results, export them directly to their CyVerse Data Store for additional downstream analyses, or
130 access them through CoGe's RESTful API (https://goo.gl/Pf4xjf).
131
132 **Benchmarking**
133 To verify that all workflows are functioning as intended we have re-analyzed publicly available
134 data using LoadExp+. In order to simulate the needs of users working in various organisms and
135 with a wide range of data sizes we performed analyses with data from *Arabidopsis thaliana*, a
136 common model organism, *Zea mays*, an agronomically important crop with a large genome, and
137 *Homo sapiens*. We also used both paired ended and single ended reads in our benchmarking.
138 All analyses were completed successfully with no errors, and the options and the run-time are
139 recorded in **Supplemental Table S1-S3**. The slowest-running analysis is often BS-seq, which is
140 expected due to the computational demands of BS-seq aligners due to alignment against wild
141 type and C->T converted genomic sequences. The slowest analysis was BS-seq in *Z. mays*
142 with paired end reads, requiring ~54 hours, while the fastest analysis was RNA-seq from
143 *Arabidopsis thaliana*, needing only 36 minutes to complete. These benchmarks represent a
144 general expectation of run times, but users should note that their precise run-time will also vary
145 based on server load.
146
147 **CoGe API**
148 Data stored in CoGe, including genomes or the outputs and intermediate files generated by
149 LoadExp+ analyses, are also accessible in a programmatic fashion. By using CoGe's RESTful

[20] application programming interface (API) (https://goo.gl/Pf4xjf) developers can integrate CoGe's web services into their own websites or analysis pipelines. This extends CoGe and LoadExp+ beyond use by individual researchers by making them available as web services to be utilized by developers.

Discussion

LoadExp+ allows users to upload, analyze, and visualize a variety of public and private NGS data using CoGe's web-accessible graphical user interfaces (GUIs) and application programming interfaces (APIs). The streamlined user interface is designed to allow novice users to quickly move from data analysis to visualization, and allows more experienced users to customize their analyses and make them available to collaborators. Data generated, and analyses performed, using LoadExp+ may be kept private, shared with collaborators, or made fully public. Currently, LoadExp+ supports RNA-seq, ChIP-seq, whole-genome bisulfite sequencing (BS-seq), variant analysis (SNP-calling), and population genetics analyses using any genome within CoGe. Users are able to upload genomes for organisms not already present in CoGe, new versions of genomes, and gene model annotations, extending the usefulness of LoadExp+ to any organism with a sequenced genome. CoGe is powered by CyVerse (www.cyverse.org) [1], providing access to high-performance, secure systems for computational scalability and interoperability. LoadExp+ offers a unified approach to NGS data analysis for both novice and experienced users.

LoadExp+ allows users to benefit from CoGe's CyVerse integration in various ways. The most important of which is federated user identity management, allowing the seamless transfer of large files from a user's CyVerse Data Store to CoGe in order to perform analyses using any of LoadExp+'s workflows. Data transfers between the Data Store and LoadExp+ are multithreaded and proceed in an automated fashion after submitting a job through the LoadExp+ GUI.

Additionally, files that are generated through LoadExp+ analyses can be easily exported to the CyVerse Data Store as well, making them accessible to the bioinformatics applications available through the rest of CyVerse, including the CyVerse Discovery Environment for managing and running additional analyses, and Atmosphere, for applications that require on-demand cloud computing.

LoadExp+ distinguishes itself from similar web-based tools due to its integration with CoGe and easily accessible workflows for numerous genomic and epigenomic analyses. While tools such as Galaxy [21] also combine a user-user friendly interface with high performance computing resources, at the time of publication it is not possible to perform the same analyses available through LoadExp+ on any of the publicly accessible Galaxy servers. Users that wish to perform bisulfite sequencing, in particular, are unserved by public Galaxy installations. In order for users to perform these or other analyses not currently part of a public Galaxy installation they will need to set up their own and install their desired workflows, negating the user-friendly nature of the platform. Many epigenomics analysis tools are also available through the CyVerse Discovery Environment [1]. However, because Discovery Environment applications are integrated by various users, usually for a specific purpose, not all options for the applications may be available. In LoadExp+ we have tried to make visible the most relevant options for each analysis, but users can contact our active development team in the event that an option they desire is not available.

Additionally, LoadExp+ leverages CoGe's automatic integration of data into our advanced genome browser, EPIC-CoGe. Once data loading or workflows through LoadExp+ are complete, output datasets are automatically available for visualization and additional analyses as tracks in EPIC-CoGe, CoGe's integrated genome browser which is based on JBrowse [19]. EPIC-CoGe allows users to manipulate visualizations of their data in various ways including

202 changing colors, normalizing or rescaling data, or searching for data that overlaps genomic
203 features of interest. Users can also export raw or processed data, or data from genomic regions
204 of interest either to their local machine or to the CyVerse Data Store.
205
206 Finally, using LoadExp+ and CoGe simplifies the management of experimental data. Data
207 generated or loaded through LoadExp+ can be made public or kept private, and can be shared
208 with other researchers easily. Data can also be organized into “Notebooks” that can, similarly,
209 kept private, made public, or shared with collaborators. LoadExp+ and CoGe offer a unified
210 approach to genomics and epigenomics data analysis and visualization for novice and
211 experienced users, as well as facilitating collaboration between scientists.
212
213 **Conclusions**
214 To fully exploit NGS technologies in biological research we must increase access to NGS
215 analysis tools. We have tackled this problem through the creation of LoadExp+, an integrated
216 suite of NGS workflows for analysis of genomic and epigenomic data within the CoGe platform.
217 These workflows enable users to easily perform a variety of analyses, share their data with
218 collaborators, and visualize their results on a single, web-based platform with an intuitive GUI.
219 While many web-based platforms exist to assist researchers analyzing NGS data, LoadExp+
220 provides additional features for managing public and private data, support for many types of
221 NGS data, and seamless integration with the EPIC-CoGe genome browser. We have verified
222 that all LoadExp+ workflows can be run successfully and benchmarked performance with
223 publicly available data (**Supplemental Tables S1-S3**).
224
225 Our primary motivation is to lower the barrier of entry into genomics research, but the
226 convenience of LoadExp+ genomics workflows makes their use an attractive option to
227 researchers of all levels. In the time that LoadExp+ has been available, over 250 experiments

228 are loaded each month by researchers (~8 per day), demonstrating the usefulness of this
229 platform.
230
231 **Methods**
232 **Benchmarking**
233 Benchmarking was performed using standard options for each workflow and publicly available
234 data (**Supplemental Tables S1-S3**). Analyses were performed one at a time to avoid multiple
235 concurrent analyses affecting run-time, however, run-time was still dependent on day-to-day
236 server load. The results from the benchmarking analyses have also been made public in a
237 CoGe notebook (https://goo.gl/dQoEGJ) and are accessible as experiment files tied to their
238 respective genomes. The experiment files generated through benchmarking are also visible as
239 selectable tracks in the EPIC-CoGe browser.
240
241 **Availability of Data and Materials**
242 LoadExp+ is freely available on the web at https://genomevolution.org under the MIT open
243 source license (source code on GitHub https://github.com/LyonsLab/coge). LoadExp+ and
244 EPIC-CoGe user interfaces are written in JavaScript and are compatible with modern web
245 browsers. Server-side components are written in PERL and Python.
246
247 **Competing interests**
248 The authors declare that they have no competing interests
249
250 **Funding**
251 This work was supported by the U.S. National Science Foundation (IOS-1339156, IOS-
252 1444490, and IOS-1546825)
253

254 **Authors' contributions**

255 JWG and MB integrated, tested, and benchmarked, the workflows. MB and EL contributed
256 code. SD led development of EPIC-CoGe. EL, RAM, and BDG conceived the project and EL
257 and RAM supervised the development of LoadExp+. JWG, EL, and RAM wrote the manuscript.
258 All authors were involved in editing and approving the final version of this manuscript.

259

260 **Acknowledgements**

261 We thank CyVerse (NSF DBI-0735191 and DBI-1265383) for sharing best practices and
262 providing data and computational infrastructure for CoGe, and Dr. Brent Pedersen and Dr.
263 Devon Ryan for their assistance in developing the methylation analysis workflows.

264

265 **References**

266 1. Merchant N, Lyons E, Goff S, Vaughn M, Ware D, Micklos D, et al. The iPlant Collaborative:
267 Cyberinfrastructure for Enabling Data to Discovery for the Life Sciences. PLOS Biol.
268 2016;14:e1002342. doi:10.1371/journal.pbio.1002342.

269 2. Towns J, Cockerill T, Dahan M, Foster I, Gaither K, Grimshaw A, et al. XSEDE: Accelerating
270 Scientific Discovery. Comput Sci Eng. 2014;16:62–74. doi:10.1109/MCSE.2014.80.

271 3. Lyons E, Freeling M. How to usefully compare homologous plant genes and chromosomes as
272 DNA sequences. Plant J. 2008;53:661–73.

273 4. Hedges M, Hasan A, Blanke T. Management and preservation of research data with iRODS.
274 In: Proceedings of the ACM first workshop on CyberInfrastructure: information management in
275 eScience - CIMS ’07. New York, New York, USA: ACM Press; 2007. p. 17.
276 doi:10.1145/1317353.1317358.

277 5. Trapnell C, Williams B a, Pertea G, Mortazavi A, Kwan G, van Baren MJ, et al. Transcript
278 assembly and quantification by RNA-Seq reveals unannotated transcripts and isoform switching
279 during cell differentiation. Nat Biotechnol. 2010;28:511–5. doi:10.1038/nbt.1621.

280 6. Krueger F, Andrews SR. Bismark: a flexible aligner and methylation caller for Bisulfite-Seq
281 applications. Bioinformatics. 2011;27:1571–2. doi:10.1093/bioinformatics/btr167.
282 7. Pedersen BS, Eyring K, De S, Yang I V, Schwartz D a. Fast and accurate alignment of long
283 bisulfite-seq reads. arXiv Prepr. 2014;:1–2. http://arxiv.org/abs/1401.1129v2.
284 8. Heinz S, Benner C, Spann N, Bertolino E, Lin YC, Laslo P, et al. Simple Combinations of
285 Lineage-Determining Transcription Factors Prime cis-Regulatory Elements Required for
286 Macrophage and B Cell Identities. Mol Cell. 2010;38:576–89. doi:10.1016/j.molcel.2010.05.004.
287 9. Li H, Handsaker B, Wysoker A, Fennell T, Ruan J, Homer N, et al. The Sequence
288 Alignment/Map format and SAMtools. Bioinformatics. 2009;25:2078–9.
289 10. Rimmer A, Phan H, Mathieson I, Iqbal Z, Twigg SRF, Wilkie AOM, et al. Integrating
290 mapping-, assembly- and haplotype-based approaches for calling variants in clinical sequencing
291 applications. Nat Genet. 2014;46:912–8. doi:10.1038/ng.3036.
292 11. McKenna A, Hanna M, Banks E, Sivachenko A, Cibulskis K, Kernytsky A, et al. The
293 Genome Analysis Toolkit: A MapReduce framework for analyzing next-generation DNA
294 sequencing data. Genome Res. 2010;20:1297–303. doi:10.1101/gr.107524.110.
295 12. Wu TD, Nacu S. Fast and SNP-tolerant detection of complex variants and splicing in short
296 reads. Bioinformatics. 2010;26:873–81.
297 13. Langmead B, Trapnell C, Pop M, Salzberg S. Ultrafast and memory-efficient alignment of
298 short DNA sequences to the human genome. Genome Biol. 2009;10:R25.
299 14. Kim D, Pertea G, Trapnell C, Pimentel H, Kelley R, Salzberg SL. TopHat2: accurate
300 alignment of transcriptomes in the presence of insertions, deletions and gene fusions. Genome
301 Biol. 2013;14:R36. doi:10.1186/gb-2013-14-4-r36.
302 15. Kim D, Langmead B, Salzberg SL. HISAT: a fast spliced aligner with low memory
303 requirements. Nat Methods. 2015;12:357–60. doi:10.1038/nmeth.3317.
304 16. Martin M. Cutadapt removes adapter sequences from high-throughput sequencing reads.
305 EMBnet.journal. 2011;17:10. doi:10.14806/ej.17.1.200.

306 17. Felix Krueger. Trim Galore! http://www.bioinformatics.babraham.ac.uk/projects/trim_galore/.

307 18. Albrecht M, Rajan D, Thain D. Making work queue cluster-friendly for data intensive

308 scientific applications. Proc - IEEE Int Conf Clust Comput ICCC. 2013.

309 19. Buels R, Yao E, Diesh CM, Hayes RD, Munoz-Torres M, Helt G, et al. JBrowse: a dynamic

310 web platform for genome visualization and analysis. Genome Biol. 2016;17:1–12.

311 doi:10.1186/s13059-016-0924-1.

312 20. Mark Masse. REST API Design Rulebook. O'Reilly Media; 2011.

313 21. Afgan E, Baker D, van den Beek M, Blankenberg D, Bouvier D, Čech M, et al. The Galaxy

314 platform for accessible, reproducible and collaborative biomedical analyses: 2016 update.

315 Nucleic Acids Res. 2016;44 May:gkw343. doi:10.1093/nar/gkw343.

316

317 **Table 1.** Workflow Summary

LoadExp+ Workflow	Analysis Tool(s)	Detailed Workflow Information (CoGe Wiki)	Visualization (Browser Track)	Analysis
RNAseq	Cufflinks [5]	https://goo.gl/KCBtbH	Alignment, Read Depth (bar plot), FPKM (bar plot)	FPKM Differential expression
BS-seq	Bismark [6] BWAmeth [7]	https://goo.gl/2eegqK	Alignment, Percent Methylation (bar plot)	Whole-genome DNA methylation
ChIPseq	HOMER [8]	https://goo.gl/aFV2T5	Peaks (bar plot)	Protein-DNA Interactions
Variant calling	SAMtools [9], Platypus [10], GATK [11], CoGe Basic	https://goo.gl/GlQGu5	SNP Genome Browser Track	SNP Discovery
Population Genetics	Nucleotide diversity, Watterson's estimator, and Tajima's D	https://goo.gl/j4nNS1	Custom report	Identification of selection, selective sweeps

318

319 **Figure Titles and Legends**

320 **Figure 1. Schematic Representation of LoadExp+ Workflow.** Data to be used in any

321 workflow may be imported directly from a user's local machine, a remote address by HTTP/FTP,

322 from SRA accession number, or from the CyVerse Data Store. After import LoadExp+ allows

323 users to choose which bioinformatics workflows to run. After the desired analyses have finished,

experimental data can be organized into “Notebooks” and viewed in CoGe’s integrated genome browser, EPIC-CoGe.

Figure 2. Data Visualization With EPIC-CoGe. At the completion of a LoadExp+ workflow, data are viewed in CoGe’s genome browser, EPIC-CoGe (based on JBrowse). Experiments appear as selectable tracks within each notebook (right side). Shown here are private quantitative data (CHH methylation, red arrows) and public diversity data (SNPs, black arrows) displayed with annotated genomic features (transposable elements) and genomic DNA sequence. The upper and lower images display the same data at different scales to show both specific details (upper) and broad features (lower).

334 **Figure 1. Schematic Representation of LoadExp+ Workflow.**

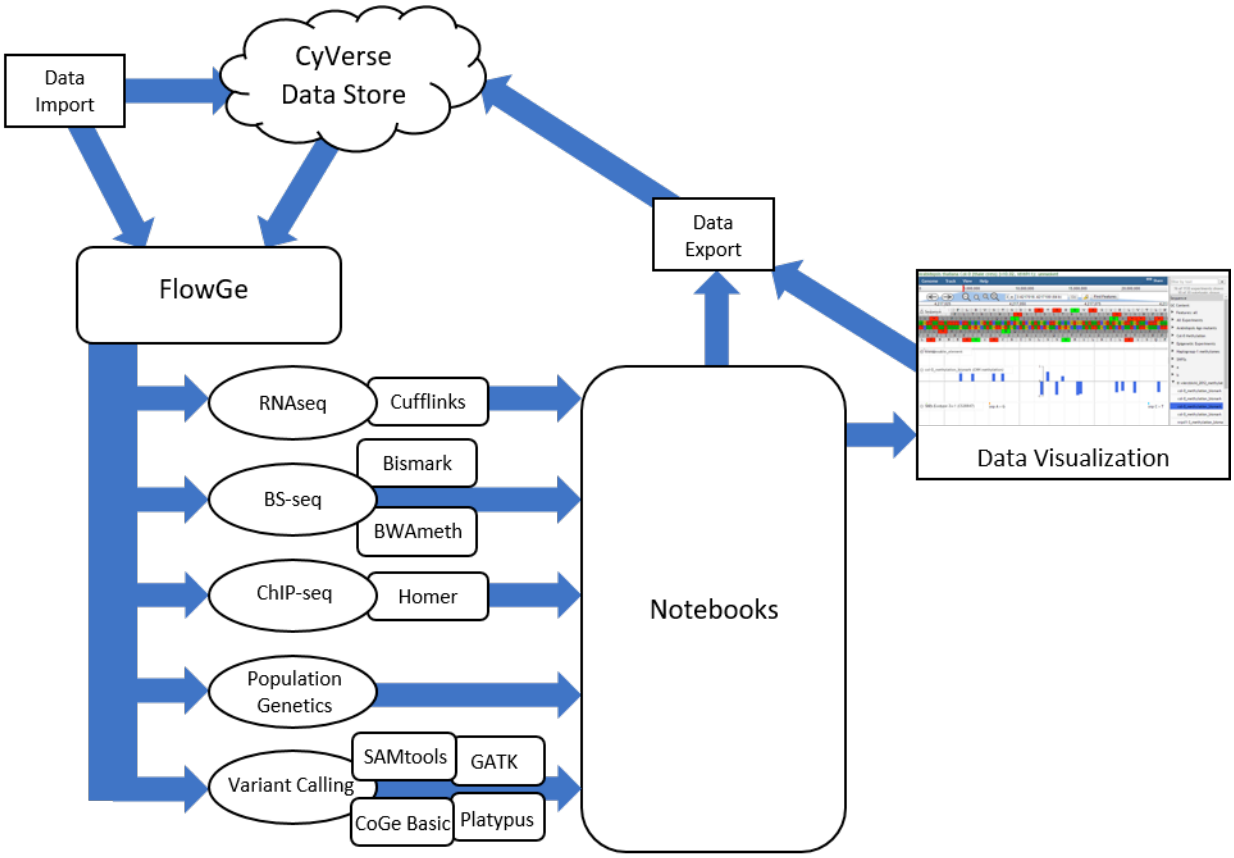

335

336

Figure 2. Data Visualization With EPIC-CoGe.